

# INTRODUCING FybROC'S TRIPLE CROWN



**NEW MODELS!  
MORE  
HORSEPOWER!**


## FybROC® Sealless Self-Priming Magnetic-Drive Pumps

**FIRST IN PERFORMANCE...FIRST IN RELIABILITY...FIRST IN CHEMICAL RESISTANCE**




### FEATURES

- Leakproof, sealless construction
- Self-priming capability
- Polypropylene and PVDF materials of construction offer broad corrosion resistance to acids, alkalis, caustics, bleaches, sea water, solvents and many harsh environments
- Maximum temperatures to 200°F
- Lifts liquids up to 20 feet
- Easy to maintain
- Handles liquids with specific gravity up to 1.8 without trimming impellers or reducing performance
- Choose from 10 sizes, 2 materials, end-suction and self-priming models

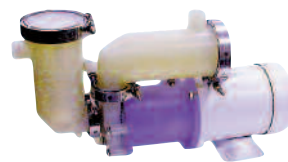


**NEW**

**3 models for flows to 40 GPM!**  
1/4, 1/3 and 1/2 Horsepower Motors

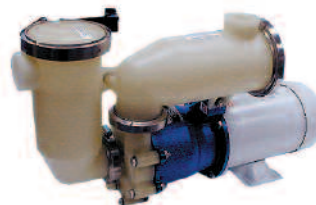

**4 models for flows to 96 GPM!**  
3/4, 1, 2, 3 and 5 Horsepower Motors

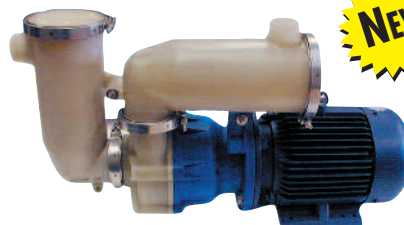

**NEW**

**3 models for flows to 212 GPM!**  
3, 5 and 7 1/2 Horsepower Motors



*FybROC Pumps...the thoroughbred  
of magnetic-drive, self-priming  
sealless pumps*


# Fybroc Sealless End Suction Magnetic-Drive Pumps

**Flows from 20 to 212 GPM, Heads to 100 Ft!**

Model Number		Minimum HP	Max Flow (GPM @ 3500 RPM) (Note 2)	Max Head (Ft. of water @ 3500 RPM) (Note 2)	Inlet (Note 2)	Outlet (Note 2)
Polypropylene	Kynar					
PM-510	KM-510	1/4	20	26	1"	1"
PM-525	KM-525	1/3	30	34	1"	1"
PM-550	KM-550	1/2	40	38	1"	1"
PM-1035	KM-1035	1/2	40	38	1 1/2"	1 1/4"
PM-1040N	KM-1040N	3/4	55	55	1 1/2"	1 1/4"
PM-1040W	KM-1040W	1	70	60	1 1/2"	1 1/4"
PM-1500	KM-1500	2	96	80	2"	1 1/2"
PM-2510	KM-2510	3	133	80	2 1/2"	2"
PM-2525	KM-2525	5	172	90	2 1/2"	2"
PM-2550	KM-2550	7 1/2	212	100	2 1/2"	2"

**Notes:** 1) All motors are TEFC. 1 and 3 phase motors are available to 2 HP. 3 phase motors are standard for 3 HP and larger. 50 Hz motors are available, consult factory.

2) All data and curves are for the end suction version of pump. Self priming models produce slightly lower flows and pressure. Inlet of self-priming pumps is same as outlet fitting listed above.

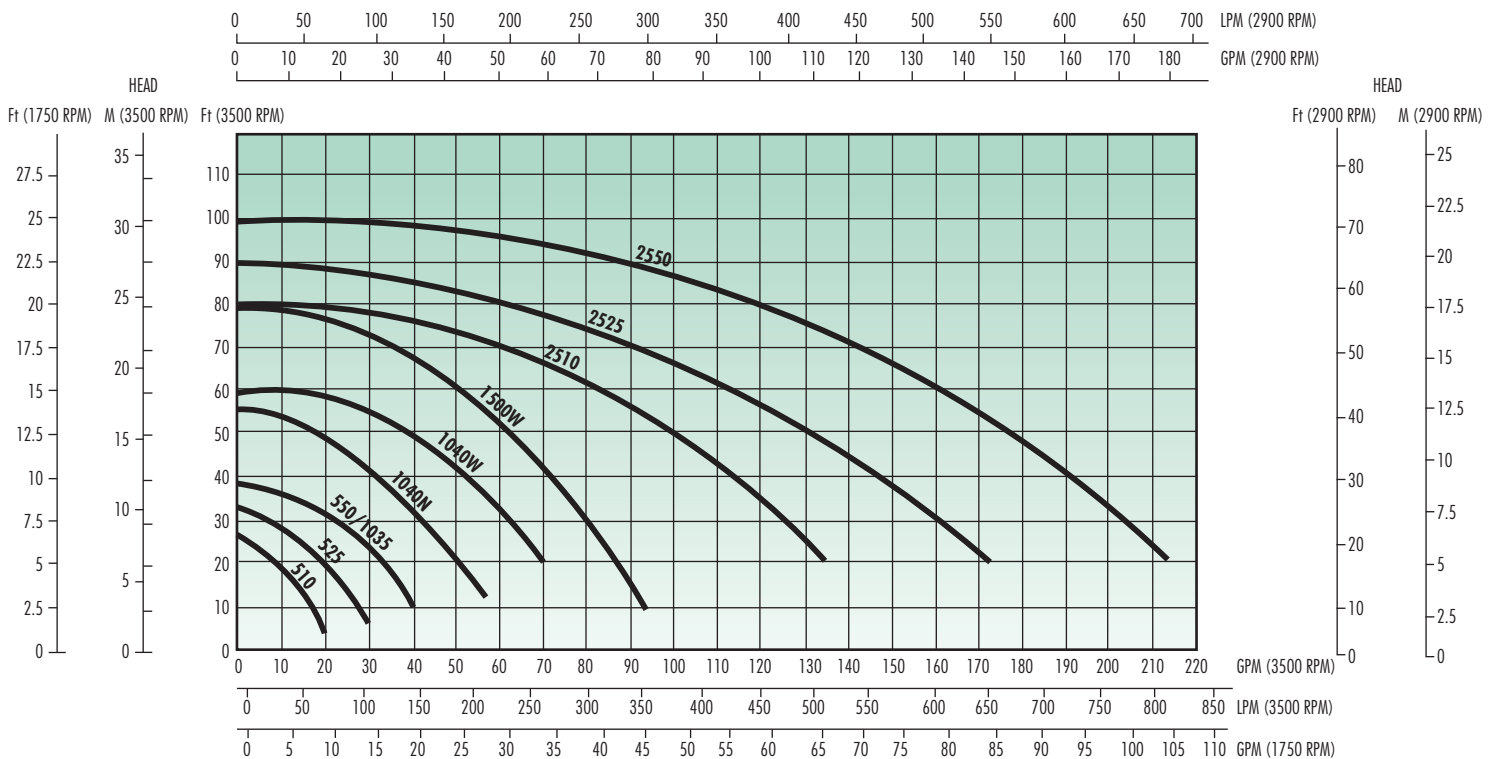

A Met-Pro Fluid Handling Technologies Business  
Combining the Resources of Dean Pump, Fybroc & Sethco

700 Emlen Way • Telford, PA 18969  
P: 215.723.8155 • TOLL-FREE: 800.FYBROC.1 • F: 215.723.2197  
info@mp-gps.com • www.mp-gps.com

